(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 24 February 2005 (24.02.2005)

PCT

(10) International Publication Number WO 2005/017929 A1

(51) International Patent Classification⁷: 9/012, 9/052

H01G 9/00,

(21) International Application Number:

PCT/JP2004/011861

- (22) International Filing Date: 12 August 2004 (12.08.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2003-292805 60/496,664

13 August 2003 (13.08.2003) JP 21 August 2003 (21.08.2003)

- (71) Applicant: SHOWA DENKO K.K. [JP/JP]; 13-9, Shiba Daimon 1-chome, Minato-ku, Tokyo 1058518 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): NAITO, Kazumi [JP/JP]; c/o Corporate R & D Center, Showa Denko K.K., 1-1, Ohnodai 1-chome, Midori-ku, Chiba-shi, Chiba 267-0056 (JP). TAMURA, Katutoshi [JP/JP]; c/o Corporate R & D Center, Showa Denko K.K., 1-1, Ohnodai 1-chome, Midori-ku, Chiba-shi, Chiba 267-0056 (JP).


- Ohie Patent Office, (74) Agent: OHIE, Kunihisa; Selva-Ningyocho 6F, 14-6, Nihonbashi-Ningyocho 2-chome, Chuo-Ku, Tokyo 103-0013 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHIP SOLID ELECTROLYTE CAPCITOR AND PRODUCTION METHOD OF THE SAME

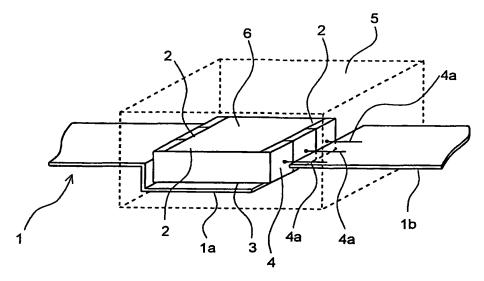

(57) Abstract: The present invention relates to a resin-molded chip solid electrolyte capacitor comprising a plurality of solid electrolyte capacitor elements horizontally laid in parallel with no gap on a pair of oppositely disposed end parts of a lead frame, and a fixing layer which is extending across the plurality of capacitor elements and fixing the capacitor elements with each other; and having low equivalent series resistance (ERS) and low leakage current (LC value), a production method of the same and an electronic device using the capacitor.